

Ferrule Fuses

FWK

750V / 5-30A (20 x 127mm)

35-60A (25 x 146mm)

Specifications

Description: Ferrule style high speed fuses for the protection of DC common bus, DC drives, power converters/rectifiers and reduced voltage starters. Low watts loss in a compact size.

Ratings:

Volts: — 750Vac

— 750Vdc (Time constant = 10-15 mS)

Amps: — 5-60A

IR: — 50kA RMS Sym.

Operating Class: aR

Agency Information: CE

Catalogue Numbers:




Catalogue Numbers	Fuse Size	Electrical Characteristics			
		Rated Current RMS-Amps	I ² t (A ² Sec)		Watts Loss
			Pre-arc	Clearing at 750Vdc	
FWK-5A20F	20 x 127mm (¹³ / ₁₆ " x 5")	5	8.5	16	6.7
FWK-8A20F		8	50	100	8.8
FWK-10A20F		10	95	200	8.5
FWK-15A20F		15	100	240	5
FWK-20A20F		20	125	315	7.8
FWK-25A20F		25	400	1100	6.5
FWK-30A20F	30	800	2600	6.5	
FWK-35A25F	25 x 146mm (1" x 5 ⁷ / ₁₆ ")	35	1300	4300	6.7
FWK-40A25F		40	1600	5300	6.8
FWK-50A25F		50	3100	12000	7.3
FWK-60A25F		60	5900	24000	7.7

Data Sheets : 720039 , 35785031

Dimensions - mm (in):

5-30A

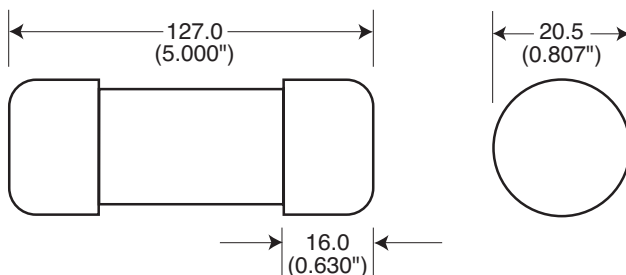

35-60A

