




ECP

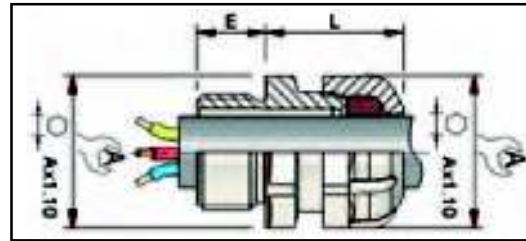

Cable gland type

- For round cable

Cable type

- Unarmoured round cable

Certification

- EN 50262

Features :

- Material: Polyamide 6/6
- Color: Grey RAL 7035
- Operculated PVC colored plasticized sealing ring
- Continuous operating temperature: -5°C to +70°C
- PVC hardening temperature: -20°C
- IP68 : 5 bars without sealing washer provided if the bearing area is satisfactory
- Entry thread metric: ISO-NF EN 60423 and NF EN 50262
- Entry thread electrical guide: UTE C 68-311 – DIN 40430

ISO

THREAD SIZE ISO	Reference	Cable		HEXAGONE	L	E	Sealing ring color	SEALING WASHER	LOCKNUT
		Diameter		A				Reference	Reference
		Min	Max						
12	CAP439120	3	6	15	18	8		CAP221249	CAP261273
16	CAP439160	4	8	19	22	8		CAP221649	CAP261673
16 Bis	CAP439170	5	10	22	22	8		CAP221649	CAP261673
20	CAP439200	7,5	13	24	23	9		CAP222049	CAP262073
20 Bis	CAP439210	9,5	15	26	23	9		CAP222049	CAP262073
25	CAP439250	13	19	32	29	11		CAP222549	CAP262573
32	CAP439320	15	25	41	29	11		CAP223249	CAP263273
40	CAP439400	21	32	52	35	13		CAP224049	CAP264073
50	CAP439500	26	38	59	40	13		CAP225049	CAP265073
63	CAP439630	31	44	65	42	14		CAP226349	CAP266373

Pg

THREAD SIZE Pg	Reference	Cable		HEXAGONE	L	E	Sealing ring color	SEALING WASHER	LOCKNUT
		Diameter		A				Reference	Reference
		Min	Max						
Pg7	CAP430070	3	6	15	18	9		CAP240749	CAP260770
Pg9	CAP430090	4	8	19	22	9		CAP240949	CAP260970
Pg11	CAP430110	5	10	22	22	9		CAP241149	CAP261170
Pg13	CAP430130	7,5	13	24	23	10		CAP241349	CAP261370
Pg16	CAP430160	9,5	15	28	23	10		CAP241649	CAP261670
Pg21	CAP430210	13	19	32	29	11		CAP242149	CAP262170
Pg29	CAP430290	15	25	41	29	12		CAP242949	CAP262970
Pg36	CAP430360	21	32	52	35	14		CAP243649	CAP263670
Pg42	CAP430420	26	38	59	40	16		CAP244249	CAP264270
N°48 NFC	CAP430480	31	44	65	42	18		CAP244849	CAP264870
Pg48 DIN	CAP437480	31	44	65	42	18		CAP244849	CAP264878