LIMITRONTM Class CC



KTK-R - 600Vac, 1/10-30A, Fast-Acting Fuses



Description: Advanced protection Class CC current-limiting, fast-acting fuses.

Catalog Symbol: KTK-R-(amp)

Ratings:

Volts - 600Vac

Amps - 1/∞-30A

IR - 200kA Vac RMS Sym.

- 20kA Vdc

Agency Information:

CE, UL Listed, Std. 248-4, Class CC, Guide JDDZ, File E4273 CSA Certified, C22.2 NO. 248.4, File 53787, Class 1422-02 RoHS Compliant


Catalog Numbers (amps)

KTK-R-1/10	KTK-R-%	KTK-R-3-1/2	KTK-R-10
KTK-R-1/8	KTK-R-¾	KTK-R-4	KTK-R-12
KTK-R-%	KTK-R-1	KTK-R-5	KTK-R-15
KTK-R-1/4	KTK-R-1-½	KTK-R-6	KTK-R-20
KTK-R-3/10	KTK-R-2	KTK-R-7	KTK-R-25
KTK-R-‰	KTK-R-2-½	KTK-R-8	KTK-R-30
KTK-R-½	KTK-R-3	KTK-R-9	

Carton Quantity and Weight

	Rating	Rating Carton Qty.	
%-30 10)	10	

Dimensions - in



Features

- Fast-acting fuse
- Melamine tube
- Nickel-plated brass endcaps
- UL Listed for branch circuit protection
- Rejection type fuse fits both standard and rejection-style holders

Recommended Fuse Blocks and Holders

Fuse Amps	1-Pole	2-Pole	3-Pole			
Open Blocks						
0-30	BC6031_	BC6032_	BC6033_			
DIN-Rail Holders						
0-30	CHCC1D_	CHCC2D_	CHCC3D_			
	_	_	OPM-NG			
	_	_	OPM-1038_			
	_	_	OPM-1038_SW			
Panel Mount Holders						
0-30	HPS	_	_			
	HPF	_	_			
In-Line Holders						
0-30	_	HEX	_			
	HEZ	_	_			

For additional information on the Class CC fuse blocks and holders, see Data Sheets:


- Open Blocks # 1105 (BC Series)
- DIN-Rail Holders # 3185 (CHCC), # 1109 (OPM), # 1102 (OPM-1038), # 1103 (OPM-1038_SW),
- Panel Mount Holders # 2113 (HPS), # 2114 (HPF)
- In-Line Holders # 2126 (HEX), # 2130 (HEZ)

LIMITRONTM Class CC



KTK-R - 600Vac, 1/10-30A, Fast-Acting Fuses

Time-Current Curves - Average Melt

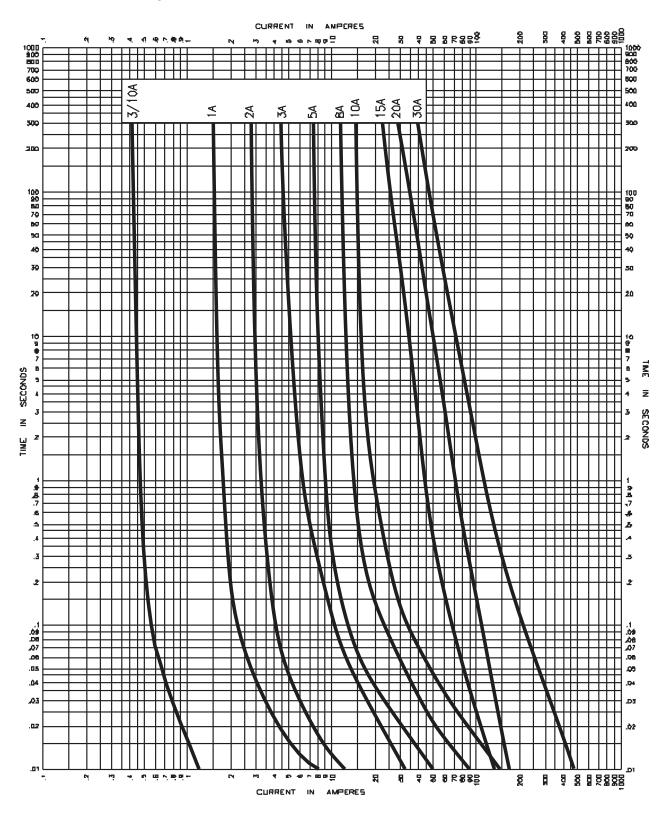


LIMITRONTM Class CC



KTK-R - 600Vac, 1/10-30A, Fast-Acting Fuses


Current-Limitation Curves

1½ to 7 Amps

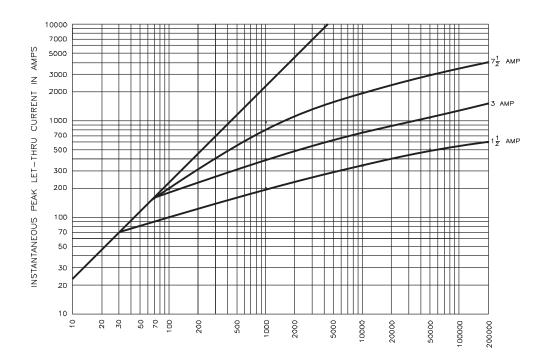

Current-Limitation Curves

10 to 30 Amps

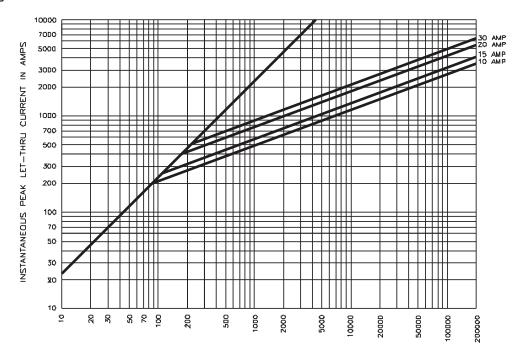

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.